



## THE RELIABLE CONVERSION ARTIST.

With our solid rubber transformers you'll always have your fitting solution for ensuring the construction power supply system gets exactly the right voltage. From low-voltage transformers to isolating transformers to inspection trolleys - we have what you're looking for.

General	62
Static safety transformers	64
Static isolating transformers	66
Mobile safety transformers	67
Mobile isolating transformers	69
Mobile isolating safety transformers	70
Mobile transformers	70
Inspection trolleys	71

## Our series

Thanks to their mechanical and electrotechnical properties, GIFAS solid rubber safety distributors are ideally suited for use as transformer housings. From wall-mounted distributors and mobile distributors to inspection trolleys, we can supply any technical construction you need. If needed, these distributors can also be engraved with your company name, for example.



## Product features

- Transformers compliant with VDE 0570 IEC 61558
- Safety-insulated housing compliant with VDE 0100 Part 410
- Sockets and plugs compliant with VDE 0623 DIN 49462/63 and EIC 309
- GS mark
- Compliance with regulations as per BVG A1, BVG A2, VDE 0100, Part 100
- Wrapped thermocouple can also be used for tangential fan control on request
- External screws made from non-rusting material and with a captive design
- Maintenance-friendly structures since all parts can be exchanged individually
- 5 years warranty on the solid rubber housing!



## Overview of the various building types and weights

Type 2516 power 120 VA	weight: 4 kg
Type 6200 power 320 to 500 VA	Weight: 10 kg
Type 6700 power 630 to 1200 VA	Weight: 21 kg
Type 3500 power 2000 VA	Weight: 22 kg
Type 3800 power 2500 VA	Weight: 38 kg
Type 7900 power 3500 VA	Weight: 48 kg

Start-up current levellers are used with a power output of 1500 VA and upwards (alternating current).

## BGI 594

The use of electrical equipment in the case of an increased electrical hazard.

When using electrical equipment

- in high electrical risk areas
- when there is limited freedom of movement
- when one experiences a strained posture due to the work may increase the risk of electrical hazards for the employees.

In case of defects not all of the available protective measures guarantee a sufficient degree of safety in situations mentioned above.

When assessing a potential hazard, a distinction is made between the following:

- conductive areas with limited freedom of movement
- other conductive areas

BGI 594 recommends taking protective measures against receiving an electric shock under fault conditions (fault protection) in the above-mentioned areas. BGI 594 contains regulations for the use of fixed and mobile electrical equipment to protect persons against the threat of an electric shock in high electrical risk areas. In the aforementioned sense:

1. There is increased risk of an electrical hazard if electrical systems and equipment are operated in conductive areas with limited freedom of movement or in other conductive areas.

2. In a conductive area with limited freedom of movement when its boundaries consist essentially of metallic parts or are electrically conductive, a person may come in extensive physical contact with the surrounding boundary. In such cases the possibility of interrupting said contact is limited (defined in accordance with VDE 0100-706).

**Table of dimensions for transformers**

Secondary currents in A with UN in V

S in VA	U <sub>N</sub>	24 V	42 V	230 V	3 X 42 V	3 X 400 V	3 X 500 V
120	I <sub>n</sub> P <sub>m</sub>	5 A 92 W	2.9 A 92 W	0.5 A 92 W			
160	I <sub>n</sub> P <sub>m</sub>	6.7 A 123 W	3.8 A 123 W	0.7 A 123 W			
250	I <sub>n</sub> P <sub>m</sub>	10.4 A 192 W	6 A 192 W	1.1 A 192 W			
320	I <sub>n</sub> P <sub>m</sub>	13.3 A 246 W	7.6 A 246 W	1.4 A 246 W			
500	I <sub>n</sub> P <sub>m</sub>	20.8 A 385 W	12 A 385 W	2.2 A 385 W			
630	I <sub>n</sub> P <sub>m</sub>	26.3 A 485 W	15 A 485 W	2.7 A 485 W			
1000	I <sub>n</sub> P <sub>m</sub>	41.7 A 770 W	23.8 A 770 W	4.3 A 770 W			
1200	I <sub>n</sub> P <sub>m</sub>	50 A 924 W	28.6 A 924 W	5.2 A 924 W	16.5 A 924 W		
1500	I <sub>n</sub> P <sub>m</sub>	62.5 A 1155 W	35.7 A 1155 W	6.5 A 1155 W	20.6 A 1155 W		
2000	I <sub>n</sub> P <sub>m</sub>	83.3 A 1540 W	47.6 A 1540 W	8.7 A 1540 W	27.5 A 1540 W	2.9 A 1540 W	2.3 A 1540 W
2500	I <sub>n</sub> P <sub>m</sub>	104.2 A 1925 W	59.5 A 1925 W	10.9 A 1925 W	34.4 A 1925 W	3.6 A 1925 W	2.9 A 1925 W
3000	I <sub>n</sub> P <sub>m</sub>	125 A 2310 W	71.4 A 2310 W	13 A 2310 W	41.3 A 2310 W	4.3 A 2310 W	3.5 A 2310 W
3500	I <sub>n</sub> P <sub>m</sub>	145.8 A 2695 W	83.3 A 2695 W	15.2 A 2695 W	48.2 A 2695 W	5 A 2695 W	4 A 2695 W
4000	I <sub>n</sub> P <sub>m</sub>	166.7 A 3080 W	95.2 A 3080 W	17.4 A 3080 W	55 A 3080 W	5.7 A 3080 W	4.6 A 3080 W
6000	I <sub>n</sub> P <sub>m</sub>	250 A 4620 W	142.9 A 4620 W	26.1 A 4620 W	82.6 A 4620 W	8.6 A 4620 W	6.9 A 4620 W

A = Apparent power (transformer output)

 I<sub>n</sub> = Rated current of the transformer

 P<sub>m</sub> = Connectable engine output at (cos. = 0.77)

# Static safety transformers



## Series 2516 / 3800

Item no.	Symbols Output	Output	Power in VA	Voltage in V	Built-in	Protective devices in A PRI / SEC
----------	----------------	--------	-------------	--------------	----------	-----------------------------------

### Designs with toroidal core transformer

#### Series 2516 / 160 x 250 x 90 mm



211118		1 CEE 2x16A/24 V	120	230/24	1 thermal overload cut-out switch	0.6
211119		1 CEE 2x16A/42 V	120	230/42	1 thermal overload cut-out switch	0.6
211120		1 CEE 2x16A/24 V	160	230/24	1 thermal overload cut-out switch	0.8
211123		1 CEE 2x16A/42 V	160	230/42	1 thermal overload cut-out switch	0.8

### Designs with block transformer

#### Series 3800 / 250 x 360 x 133 mm



262227		2 CEE 2x16A/24V	320	230/24	1 thermal overload cut-out switch	1.6
261018		2 CEE 2x16A/42V	320	230/42	1 thermal overload cut-out switch	1.6
262250		2 CEE 2x16A/24V	500	230/24	1 thermal overload cut-out switch	2.0
262251		2 CEE 2x16A/42V	500	230/42	1 thermal overload cut-out switch	2.0
211127		2 CEE 2x16A/24V	630	230/24	1 thermal overload cut-out switch	3.0 / microf. 16
242142		2 CEE 2x16A/42V	630	230/42	1 thermal overload cut-out switch	3.0







Other equipment upon request.

**Series 3900 / 7900**

Item no.	Symbols Output	Output	Power in VA	Voltage in V	Built-in	Protective devices in A PRI / SEC
----------	----------------	--------	-------------	--------------	----------	-----------------------------------

**Designs with block transformer**






**Series 3900 / 250 x 360 x 173 mm**

211201		3 CEE 2x16A/24V	1000	230/24	1 thermal overload cut-out switch	5.0 / microf. 16
211250		3 CEE 2x16A/42V	1000	230/42	1 thermal overload cut-out switch	5.0 / microf. 16
211261		3 CEE 2x16A/24V	1200	230/24	1 thermal overload cut-out switch	6.0 / microf. 16
211252		3 CEE 2x16A/42V	1200	230/42	1 thermal overload cut-out switch 1 ICL	6.0 / microf. 16
211262		4 CEE 2x16A/24V	1500	230/24	1 thermal overload cut-out switch 1 ICL	7.0 / microf. 16
211253		3 CEE 2x16A/42V	1500	230/42	1 thermal overload cut-out switch 1 ICL	7.0 / microf. 16



**Designs with block transformer**

**Series 7900 / 500 x 360 x 173 mm**

211264		6 CEE 2x16A/24V	2000	230/24	1 thermal overload cut-out switch 1 ICL	10.0 / microf. 16
211255		6 CEE 2x16A/42V	2000	230/42	1 thermal overload cut-out switch 1 ICL	10.0 / microf. 16
211208		6 CEE 2x16A/24V	2500	230/24	1 thermal overload cut-out switch 1 ICL	12.0 / microf. 16
211258		6 CEE 2x16A/42V	2500	230/42	1 thermal overload cut-out switch 1 ICL	12.0 / microf. 16
211259		6 CEE 2x16A/42V	3000	230/42	1 thermal overload cut-out switch 1 ICL	16.0 / microf. 16



Other equipment upon request.

# Static isolating transformers



## Series 2516 / 3800 / 3900 / 7900

Item no.	Symbols Output	Output	Power in VA	Voltage in V	Built-in	Protective devices in A PRI / SEC
----------	----------------	--------	-------------	--------------	----------	-----------------------------------

### Designs with toroidal core transformer

#### Series 2516 / 160 x 250 x 90 mm

211129		1 protective contact socket without $\perp$	120	230/230	1 thermal overload cut-out switch	0.6
211130		1 protective contact socket without $\perp$	160	230/230	1 thermal overload cut-out switch	0.8



### Designs with block transformer

#### Series 3800 / 250 x 360 x 133 mm

262258		1 protective contact socket without $\perp$	320	230/230	1 thermal overload cut-out switch	1.6
262259		1 protective contact socket without $\perp$	500	230/230	1 thermal overload cut-out switch	2.0
242143		1 protective contact socket without $\perp$	630	230/230	1 thermal overload cut-out switch	3.0



### Designs with block transformer

#### Series 3900 / 250 x 360 x 173 mm

211192		1 protective contact socket without $\perp$	1000	230/230	1 thermal overload cut-out switch	5.0
211196		1 protective contact socket without $\perp$	1200	230/230	1 thermal overload cut-out switch	6.0
211244		1 protective contact socket without $\perp$	1500	230/230	1 thermal overload cut-out switch 1 ICL	7.0
211245		1 protective contact socket without $\perp$	2000	230/230	1 thermal overload cut-out switch 1 ICL	10.0



### Designs with block transformer

#### Series 7900 / 500 x 360 x 173 mm

211246		1 protective contact socket without $\perp$	2500	230/230	1 thermal overload cut-out switch 1 ICL	12.0
211247		1 protective contact socket without $\perp$	3500	230/230	1 thermal overload cut-out switch 1 ICL	16.0



Illustration similar

Other equipment upon request.

Series 2516 / 6200 / 6700

Item no.	Symbols Output	Output	Power in VA	Voltage in V	Built-in	Protective devices in A PRI / SEC
----------	----------------	--------	-------------	--------------	----------	-----------------------------------

Designs with toroidal core transformer

Series 2516 / 250 x 160 x 90 mm

208768		1 CEE 2x16A/24V	120	230/24	1 thermal overload cut-out switch	0.6
208628		1 CEE 2x16A/42V	120	230/42	1 thermal overload cut-out switch	0.6
209431		1 CEE 2x16A/24V	160	230/24	1 thermal overload cut-out switch	0.8
209430		1 CEE 2x16A/42V	160	230/42	1 thermal overload cut-out switch	0.8



Designs with block transformer

Series 6200 / 280 x 275 x 230 mm

208045		2 CEE 2x16A/24V	320	230/24	1 thermal overload cut-out switch	1.6
208353		2 CEE 2x16A/42V	320	230/42	1 thermal overload cut-out switch	1.6
208093		2 CEE 2x16A/24V	500	230/24	1 thermal overload cut-out switch	2.0
208094		2 CEE 2x16A/42V	500	230/42	1 thermal overload cut-out switch	2.5



Designs with block transformer

Series 6700 / 350 x 305 x 280 mm

210939		2 CEE 2x16A/24V	630	230/24	1 thermal overload cut-out switch	3.0 / microf. 16
209379		2 CEE 2x16A/42V	630	230/42	1 thermal overload cut-out switch	3.0
208899		4 CEE 2x16A/24V	1000	230/24	1 thermal overload cut-out switch	5.0 / microf. 16
208897		4 CEE 2x16A/42V	1000	230/42	1 thermal overload cut-out switch	5.0 / microf. 16
208570		4 CEE 2x16A/24V	1200	230/24	1 thermal overload cut-out switch	6.0 / microf. 16
208382		4 CEE 2x16A/42V	1200	230/42	1 thermal overload cut-out switch	6.0 / microf. 16



Other equipment upon request.



## Series 3500 / 7900

Item no.	Symbols Output	Output	Power in VA	Voltage in V	Built-in	Protective devices in A PRI / SEC
----------	----------------	--------	-------------	--------------	----------	-----------------------------------

### Designs with block transformer

#### Series 3500 / 360 x 250 x 360 mm



210996		4 CEE 2x16A/24V	1500	230/24	1 thermal overload cut-out switch 1 ICL	7.0 / microf.16
211000		4 CEE 2x16A/42V	1500	230/42	1 thermal overload cut-out switch 1 ICL	7.0 / microf.16
211002		6 CEE 2x16A/24V	2000	230/24	1 thermal overload cut-out switch 1 ICL	10.0 / microf.16
211006		6 CEE 2x16A/42V	2000	230/42	1 thermal overload cut-out switch 1 ICL	10.0 / microf.16

### Designs with block transformer

#### Series 7900 / 500 x 360 x 173 mm



240790		6 CEE 2x16A/24V	2500	230/24	1 thermal overload cut-out switch 1 ICL	12.0 / microf.16
240182		6 CEE 2x16A/42V	2500	230/42	1 thermal overload cut-out switch 1 ICL	12.0 / microf.16
211020		8 CEE 2 x16A/24V	3000	230/24	1 thermal overload cut-out switch 1 ICL	15.0 / microf.16
211030		8 CEE 2x16A/42V	3000	230/42	1 thermal overload cut-out switch 1 ICL	15.0 / microf.16
211033		10 CEE 2x16A/24V	3500	230/24	1 thermal overload cut-out switch 1 ICL	15.0 / microf.16
211058		10 CEE 2x16A/42V	3500	230/42	1 thermal overload cut-out switch 1 ICL	15.0 / microf.16

Other equipment upon request.



## Series 2516 / 3500 / 3900 / 6200 / 6700 / 7900

Item no.	Symbols Output	Output	Power in VA	Voltage in V	Built-in	Protective devices in A PRI / SEC
----------	----------------	--------	-------------	--------------	----------	-----------------------------------

### Designs with toroidal core transformer



#### Series 2516 / 250 x 160 x 90 mm

208629		1 protective contact socket without $\perp$	120	230/230	1 thermal overload cut-out switch	0.6
210937		1 protective contact socket without $\perp$	160	230/230	1 thermal overload cut-out switch	0.8



### Designs with block transformer


#### Series 3500 / 360 x 250 x 360 mm

203728		1 protective contact socket without $\perp$	1500	230/230	1 thermal overload cut-out switch 1 ICL	7.0
203732		1 protective contact socket without $\perp$	2000	230/230	1 thermal overload cut-out switch 1 ICL	10.0



### Designs with block transformer



#### Series 3900 / 250 x 360 x 173 mm

236690		1 protective contact socket without $\perp$	2500	230/230	1 thermal overload cut-out switch 1 ICL	12.0
--------	---	---	------	---------	--	------



### Designs with block transformer




#### Series 6200 / 280 x 275 x 230 mm

210938		1 protective contact socket without $\perp$	320	230/230	1 thermal overload cut-out switch	1.6
208095		1 protective contact socket without $\perp$	500	230/230	1 thermal overload cut-out switch	2.5



### Designs with block transformer


#### Series 6700 / 350 x 305 x 280 mm

208900		1 protective contact socket without $\perp$	1000	230/230	1 thermal overload cut-out switch	5.0
209108		1 protective contact socket without $\perp$	1200	230/230	1 thermal overload cut-out switch	6.0
263293		1 protective contact socket without $\perp$	2500	230/230	1 thermal overload cut-out switch	12.0



### Designs with block transformer

#### Series 7900 / 500 x 360 x 173 mm

210355		1 protective contact socket without $\perp$	3500	230/230	1 thermal overload cut-out switch 1 ICL	16.0
--------	---	---	------	---------	--	------



Other equipment upon request.

## Mobile isolating safety transformers with multiple separate coils


Series 7900 / 500 x 360 x 173 mm

### Application

- In conductive areas with limited freedom of movement
- For use compliant with VDE 0100 Part 706

For the current supply to hand-held electrical tools and measuring equipment, according to VDE 0100 Part 706, either:

- safety low voltage or
- safety isolation is required, with each secondary coil in the isolating transformer only being allowed to supply a single consumer. An isolating transformer can have various secondary coils.

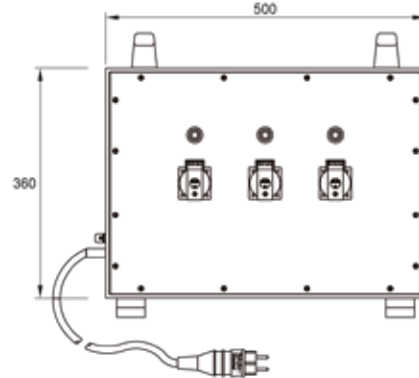

Item no.	Symbols Output	Output	Power in VA	Voltage in V	Built-in	Protective devices in A PRI / SEC
211336		3 protective contact sockets	3000VA 230V	1000VA/230V 1000VA/230V 1000VA/230V	1 thermal overload cut-out switch 1 ICL	15.0 / microf.16
211340		1 protective contact socket 2 CEE 2x16A/24V	3000VA 230V	2500VA/230V 500VA/24V	1 thermal overload cut-out switch 1 ICL	15.0 / microf.16
211343		1 protective contact socket 2 CEE 2x16A/42V	3000VA 230V	2500VA/230V 500VA/42V	1 thermal overload cut-out switch 1 ICL	15.0 / microf.16

## Mobile transformers

### Transformer on zinc-plated chassis

#### Technical data

Max. transformer power: 4kVA  
 Dimensions of distributor: 500x360x173 mm  
 Dimensions of chassis: 566x1250x560 mm  
 Weight: approx. 70 kg  
 Protection category: IP 54



Item no. 210333, Fig. similar

### Transformer on zinc-plated special hand cart

#### Technical data

Max. transformer power: 12.5 kVA  
 Dimensions WxHxD: 560x1200x590 mm  
 Weight: approx. 200 kg  
 Protection category: IP 54



Item no. 246321

Item no.	Symbols Output	Output	Input	Built-in	Cable protection / personal safety
210333		10 CEE 2x16A/42V	4m 5x6 mm <sup>2</sup> CEE 5x32A/400V	1 4kVA safety transformer, 400V/42V, 50 Hz compliant with VDE 0551 primary side pre-fused via 1 6-10 A 3-pin motor circuit breaker, thermal rated current set to 10A	MCB 16A 1p. B
246321		1 CEE 5x16A/400V 3 protective contact sockets	3m 5x2.5 mm <sup>2</sup> CEE 5x16A/400V	1 12.5 kVA three-phase current isolating transformer Primary: 3x400V/ 50Hz Secondary: 1 3x400V coil, 50Hz, 6KVA, 1 intermediate pickup 3.5 KVA, 230 V, 1 intermediate pickup 2.5 KVA, 230 V	Motor circuit breaker 3p., thermal rated current, set to 14A 16A Neozed fuses

## Inspection trolleys



500Volt inspection trolley with 5 metre Proflexx 07 cable

### Product features

- Solid rubber distributor 7900 + 3800 attached to a 55 kVA three-phase current transformer in sheet steel housing with 2 castor and 2 fixed wheels as well as impact protection at the top
- Primary: 3x500V/50 Hz, Secondary: 3x400V/50 Hz
- Switching group Dyn 5 as per VDE 0570
- Dimensions: LxHxD = 1050x1250x760mm
- Weight: approx. 400kg

### Technical data

Input:	5m Proflexx-07 cable 4x16mm <sup>2</sup> with CEE plug 4x63 A/500V
Output:	1 CEE 5x63A/400V, 1 CEE 5x32A/400V, 2 CEE 5x16A/400V, 2 CEE 3x16A/230V, 2 protective contact 230V 1 leakage current circuit breaker switch 63/0.03A 1 leakage current circuit switch 40/0.03A
Built-ins:	1 63A main switch 1 EMERGENCY STOP push-button



400Volt inspection trolley with 3 metre Proflexx 07 cable

### Product features

- Solid rubber 7900 distributor mounted onto a zinc-plated steel underframe with shock and impact protection at the top and bottom, with 2 castor and 2 fixed wheels and 4 crane eyelets
- Dimensions: LxWxH: 1030x700x910mm
- Weight: approx. 250kg

### Technical data

Input:	3 m PROFLEX-07 cable 5x16mm <sup>2</sup> with CEE plug 5x63 A/400V
Output:	1 CEE 5x63 A/400V, 2 CEE 5x32A/400V 3 CEE 5x16 A/400V, 2 CEE 3x16A/230V 10 230V protective contact 4 63/0.03A leakage current circuit breaker switches
Built-ins:	1 63A 3-pin main switch 1 EMERGENCY STOP push-button



Inspection trolley with zinc-plated steel underframe, shock and impact protection, cable winding device, 4 crane eyelets



"3 in 1" inspection trolley  
Transformer, large cable reel and trailer

### Product information

- Inspection trolley, painted sheet steel housing on flatbed truck
- Flatbed trailer with towing bar
- Approval for public road use possible

### Technical data

Three-phase current transformer:	100KVA / 500/400Volt
Sheet steel cable reel:	2x type 523 with brake
Cables:	80m H07RN-F, 4x35qmm, 500Volt side 80m H07RN-F, 5x35qmm, 400Volt side
Total weight:	approx. 1,800 kg
Overall dimensions:	4490x2010x1230mm

Other designs and equipment available upon request.

## **WE ARE EXPERTS IN YOUR FIELD**

Construction industry

Industrial sector

Safety equipment

### **Transformers**

**Online products available  
at [www.gifas.de/en](http://www.gifas.de/en)**

Find the suitable product  
solution for you on our  
website and read all the  
latest news about our  
products.

