

Highbay LINEAR highbay lamp



Highbay LINEAR


The Highbay LINEAR is specially designed for use in high-bay warehouses. Its great efficiency allows for a high potential in energy savings. The optimised thermal management allows the light to be used in high ambient temperatures of up to 60°C.

The Highbay LINEAR can be attached directly to the ceiling using the supplied stainless steel brackets. The brackets allow fine light adjustments ranging from +/- 20°. Alternatively, the light can be suspended using wire ropes.

Product properties

- precise optics for oval light cones 40° x 80°
- optimised thermal management for high ambient temperatures
- high efficiency

Beam angle 40° x 80°

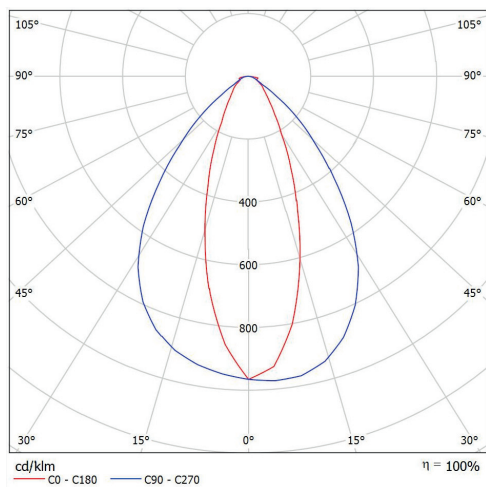

Technical data

System output	120W / 150W / 180W / 210W / 240W
Luminous flux	16800lm / 21000lm / 25200lm / 29400lm / 33600lm
Output LED	140lm/W
Light colour	5000K
CRI index	Ra >80
Beam angle	40° x 80°
Input voltage	100-277VAC
Service life	>50000h
Protection type	IP65
Protection class	1
Impact resistance	IK08
Temperature operating range	-40°C to +60°C
Casing	Aluminium
Cover	Polycarbonate
Connecting lead	20cm
Weight	4.7kg / 5.0kg / 6.3kg / 6.5kg / 8.1kg
Dimensions (WxLxH)	120W/150W 686x190x118mm 180W/210W 986x190x118mm 240W 1286x190x118mm

Assortment

Item no	Description
293805	Highbay LINEAR/W120V230/40°x80°
293806	Highbay LINEAR/W150V230/40°x80°
293807	Highbay LINEAR/W180V230/40°x80°
293808	Highbay LINEAR/W210V230/40°x80°
293809	Highbay LINEAR/W240V230/40°x80°

Accessories

294443	Suspension kit approx 1.2m stainless steel
--------	--

Other light colours also possible on request.