



PERFECT VISIBILITY ANYWHERE, ANYTIME.

Mobile work lights make working more pleasant and are the perfect addition to hall or area lighting. The GIFAS product range impresses with its robustness and high flexibility in practical use.

911 Hand-held floodlight	206
StabiLED stable light	207
PrimaLED 2 floodlight	208
PortLED allround light	210
BALL LIGHT LED work light 360°	211
FlexLED LED on cable reel	212
Application cases	213

911 LED-hand-held floodlight



The powerful 911 hand-held floodlight is now also available with the latest LED technology.

Product features

- Protective insulation, impact-resistant light body made from solid rubber with hanging ring
- Ergonomic handle with combination switch for constant light and pulsed operation
- Shatter-proof safety glass
- Combination ON/OFF switch and touch function

Technical data

Input voltage	230V, 42/24VAC
Power supply	Mains connection
Light source	6x2W LEDs
Luminous flux	1400lm
Protection category	IP54
Protection class	II / III
Housing	Solid rubber
Cover	Safety glass
Weight	1200g (without cable)

Item no.	Description	Supply cable	Plug
276195	24VAC/12W	5m 2x1.5mm ²	CEE 16A/24V
274285	24VAC/12W	10m 2x1.5mm ²	CEE 16A/24V
273643	42VAC/12W	10m 2x1.5mm ²	CEE 16A/42V
279566	42VAC/12W	5m 2x1.5mm ²	CEE 16A/42V
274286	230VAC/12W	3m 2x1.5mm ²	230V protective contact

Accessories / spare parts

105119	Rubber housing for light
105623	Toggle switch
110223	Spare front pane
274580	LED driver 24-42 VAC/DC for 911LED, without housing
270241	LED PCB for 911LED

911 Additional options



In accordance with applicable regulations, energy consumers with appropriate protective low voltages must be used in areas where there are conductive materials.

The combination halogen hand-held floodlight with cable reel is specifically ideal for use during inspection work in large boiler tanks, containers and similar vessels.

Important! The relevant application regulations must be observed while, before using these additional options.

Item no.	Description
278756	LED hand-held spotlight 911, 12W, on cable reel completely equipped with 20m supply line 2x1.5mm ² on main role, toroidal transformer 230 / 24V-120VA installed, supply line 5m 2x1.5mm ² with contour plug on additional role
284235	LED handheld spotlight 911, 7.5W, on cable reel completely equipped with 20m cable, supply line 2x2.5mm ² on main role, toroidal transformer 230 / 24V – 120VA installed, supply line 5m, 2x1.5mm ² with contour plug on additional role
208768	Mobile security transformer, case type 2516 120VA, 230/24V
208628	Mobile security transformer, case type 2516 120VA, 230/42V

StabiLED LED tubular light



Innovative lighting technology with increased safety is the base of our development for the StabiLED series. Outstanding light power with minimal energy consumption is its hallmark feature.

Product features

- Grip and cap made from insulating material with shock absorbing protection glass
- Glare-free work light distributed along a long length
- Built-in electronics with protection module
- Handy hanging device with rotating hook
- Unaffected by temperature fluctuations
- Oil, acid and ageing resistant, self-extinguishing

Technical data

Input voltage	230VAC, 42/24VAC/DC
Power supply	Mains connection
Light source	6x1W high-power LEDs
Luminous flux	2600lm
Service life	> 70000h
Protection category	IP55
Protection class	II / III
Housing	Solid rubber
Cover	Polycarbonate
Weight	250g (without cable)
Dimensions (ØxL)	60x500mm

Item no.	Description	Supply cable	Plug
256735	24V	5m 2x1.0mm ²	CEE 16A/24V
256738	24V	10m 2x1.0mm ²	CEE 16A/24V
256737	42V	5m 2x1.0mm ²	CEE 16A/42V
256739	42V	10m 2x1.0mm ²	CEE 16A/42V
256733	230V	5m 2x1.0mm ²	Contour plug
256734	230V	10m 2x1.0mm ²	Contour plug

Accessories / spare parts

256731	Electronics for 24/48VAC/DC
256724	Electronics for 230V
256725	Protective tube for 24/42 and 230V
258153	Rubber cap with hook
258151	Rubber grip
258234	Magnetic holder, holding force 209 N with clamping bridge
258915	Suction cup holder with clamp

Other designs available upon request.

Work lights

PrimaLED 2 25W flood light



The PrimaLED 2 is a professional luminaire with high light output in combination with low evolution of heat and low energy consumption. This work light guarantees an optimum surface illumination through glare-free and evenly distributed light. In addition, the flood light offers various installation options for every application: hanging, lying or standing!

Product features

- Full light flux immediately available
- Low energy consumption with a high light yield
- Minimal temperature development
- Extremely switching-resistant (> 1 million)
- Maintenance-free
- No UV / IR-radiation
- Carrying handle also serves as a support which, when engaged, moves the lights to the desired position
- Impact and shock resistant, water and dust-proof

TOP !

TOP !

Technical data

Input voltage	230VAC, 24/42VAC/DC
Power supply	Mains connection
Luminous flux	4200lm
LED efficiency	165lm/W
Light colour	4000K
Lifetime	L70/B10 80000h
Protection category	IP65 (without socket) IP54 (with socket)
Protection class	I (230V with socket) II (230V without socket) III (24/42 V)
Temperature operating range	-20°C to +40°C
Housing	Polycarbonate
Cover	Satin-finish PMMA
Weight	3.1kg
Dimensions (WxHxD)	305x295x110mm

PrimaLED 2 with battery pack

The PrimaLED 2 is also available with a 6.000mAh battery pack.

Item no.	Description	Socket	Supply cable	Plug
297459	24V/25W	CEE 24V	5m 2x1.5mm ²	CEE 16A/24V
297460	24V/25W	-	5m 2x1.5mm ²	CEE 16A/24V
297461	24V/25W	CEE 24V	10m 2x1.5mm ²	CEE 16A/24V
297462	24V/25W	-	10m 2x1.5mm ²	CEE 16A/24V
297483	42V/25W	CEE 42V	5m 2x1.5mm ²	CEE 16A/42V
297484	42V/25W	-	5m 2x1.5mm ²	CEE 16A/42V
297485	42V/25W	CEE 42V	10m 2x1.5mm ²	CEE 16A/42V
297486	42V/25W	-	10m 2x1.5mm ²	CEE 16A/42V
297448	230V/25W	PC*	5m 3x1.5mm ²	PC*
297449	230V/25W	-	5m 2x1.5mm ²	Contour plug
297450	230V/25W	PC*	10m 3x1.5mm ²	PC*
297451	230V/25W	-	10m 2x1.5mm ²	Contour plug

*PC = protective contact

Accessories / spare parts	
262926	Basic stand - height 1.20m to 2.00m, load up to 30kg
261246	Plus stand 3-part - height 1.22m to 2.75m
261251	Mobile Plus stand 3-part - height 1.22m to 2.75m
261249	Plus stand 4-part - height 1.30m to 4.00m
261253	Mobile Plus stand 4-part - height 1.30m to 4.00m
271698	Uni stand top piece
273561	Uni stand top piece - extension for 1x PrimaLIGHT
264916	Twin adapter for 1 + 1 light Span width adjustable from 310mm to 490mm
284468	Front pane PrimaLED 2
230801	Reflector
230802	Handle
230810	Wall fitting
248199	Ceiling bracket
258506	Magnetic bracket
235824	Plus magnetic bracket

Other designs available upon request.

PrimaLED 2 and NovaLED 2 Accessories

Screw-fix ceiling bracket
with locking mechanism
Item no. 248199



Ceiling mounting



Screw-fix wall bracket
Item no. 230810



Wall mounting



Plus magnetic bracket
Item no. 235824



Magnetic bracket for ceiling / wall mounting
(1 light) with locking mechanism
Item no. 258506



PrimaLED 2 floodlight with three ring eyelets
equipped for chain, hanging, etc.
Item no. on request



Uni stand top piece
Item no. 271698



Uni stand top piece extension
for 1x PrimaLED 2
Item no. 273561



Twin adapter for stand top piece
1+1 PrimaLED 2
Item no.: 264916



Basic stand Item no. 262926




Plus stand 3-part* Item no. 261246



* on request also
3-part mobile Item no. 261251
4-part static Item no. 261249
4-part mobile Item no. 261253

Work lights

PortLED Allround light

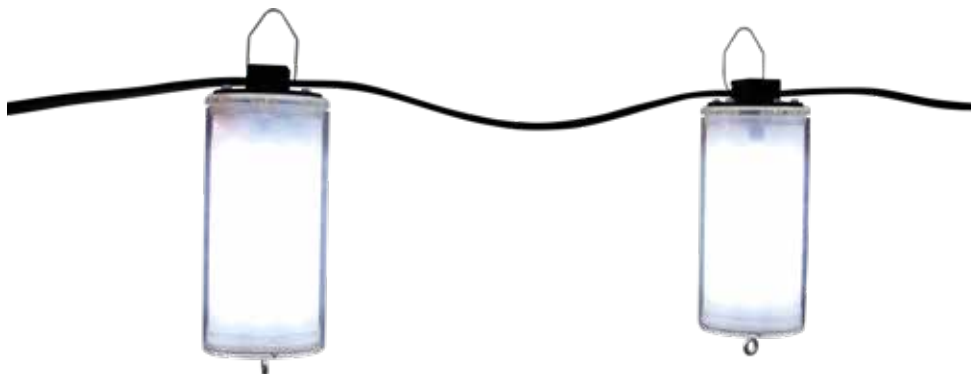

The PortLED is an all-round lamp for large-area illumination of work environments for indoor and outdoor use. The lamp is operated hanging. Operation is only permitted on the rubberized ribbon cable H05RNH2-F. The lamp can be flexibly positioned at any point on the cable using the clamp connector.

The impact-resistant and satin-finished polycarbonate (PC) cover minimizes glare and ensures even light distribution with high visual comfort. The high protection class IP66 protects the luminaire against the ingress of dirt and water. The cover is exchangeable.

Product features

- Low energy consumption with high light yield
- Minimum Temperature development
- Shock resistant and replaceable cover
- Shock and vibration insensitive
- Easy mounting on ribbon cable

Technical data

Input voltage	42VAC/DC, 110VAC/DC
System performance	17W
Luminous flux	1900lm / 2100lm
System efficiency	110lm/W 125lm/W
Light colour	5000K
Beam angle	360°
CRI	>80 Ra
Service life	>50000h [L70/B30]
Protection category	IP66
Shock resistance	IK10
Temperature operating range	-40°C to +50°C
Housing material	PMMA, PC
Cover	PC matt
Weight	0.65kg
Dimensions (LxD)	280x90mm

PortLED/W17V110ACDC		Automatic circuit breaker		
		B20A	C20A	D20A
Max. lights on fuse		30 pcs	50 pcs	100 pcs
Max. cable length 2x1.5mm²		160m	100m	
Max. cable length 2x2.5mm²		200m	150m	75m
PortLED/W17V42ACDC				
Max. lights on fuse		25 pcs	40 pcs	40 pcs
Max. cable length 2x1.5mm²		50m	25 pcs	25 pcs
Max. cable length 2x2.5mm²		90m	50m	50m
Item no.	Description			
292982	PortLED/W17V110ACDC			
292983	PortLED/W17V42ACDC			
Accessories / spare parts				
292984	Replacement cover of PC			
292985	Cable H05RNH2-F 2x1.5mm²			
292986	Cable H05RNH2-F 2x2mm²			
293899	Poetry flat cable M25			

BALL LIGHT
LED work light 360°


Item no. 333484



Item no. 333485

The powerful LED work light achieves up to 11,500 lumens and provides a beam angle of 360°. Thanks to the diffuse housing lens, the light provides glare-free and pure white light diffusion. The robust housing made of highly impact-resistant plastic can even withstand hard knocks. This is a basic requirement for any professional who relies on high-quality tools on a daily basis. A 5 metre connection cable enables flexible use. Various tools or machines (max. 3,000W) can be connected to additional Schuko sockets integrated into the luminaire housing without any problems. Thanks to the unique mounting hook and the luminaire can be positioned in different applications. The light can also be mounted on a tripod to distribute the light over an even larger area.

Item no.	Description
333484	BALL LIGHT 50W
333485	BALL LIGHT 100W

Technical data

Input voltage	100-240V (50-60 Hz)
Light source	SMD LEDs
System output	50W / 100W
Luminous flux	5,000lm / 11,500lm
Light colour	6,500K
Beam angle	360°
CRI (colour rendering index)	Ra ≥80
Protection category (lamp)	IP54
Impact resistance	IK08
Housing	high-impact resistant plastic
Housing colour	black
Connection cable	5m H07RN-F 3x1.5mm² with IP44 Schuko plug
Schuko sockets	
50W / 100W	1 / 2
Weight	
50W / 100W	approx. 2.3kg / approx. 4.2kg
Dimensions (HxWxD)	
50W	280×280×255mm
100W	315×280×280mm

Work lights

FlexLED

Continuous rooflight on cable reel / on reel



Handle with integrated rubber band to lock the castor in place

The flexible and double-sided FlexLED LED strip light is the flexible alternative to conventional lighting. Quick and easy quick and easy suspension from ceilings, tunnel walls, scaffolding or in access areas, the respective work areas are optimally illuminated all round - without casting any shadows. The FlexLED is encased in a high-quality and durable clear PVC tube that is suitable for indoor and outdoor use (IP65). With a length of 10m on a reel and 50m or 25m on a cable reel, the continuous line is supplied ready for connection. It is connected using the supplied connection cable with contour plug. For maximum illumination of large, the FlexLED 230V continuous-row lighting system can be can be operated over a total length of up to 100 metres.

Product features - Emergency battery for FlexLED 230V

With the emergency power battery, the FlexLED can continue to be operated at reduced brightness for up to a maximum of 2 hours if the power supply is interrupted.

It has an internal built-in battery charge protection with protection against overcharging and overdischarging. The emergency battery is supplied with a 1.5 metre connection cable with a Schuko plug.

The battery status can be checked by pressing the illuminated push when the emergency function is switched on:

Number of red light flashes (blinking):

- 1× = 0 %-20 % remaining power
- 2× = 20 %-40 % remaining power
- 3× = 40 %-60 % remaining power
- 4× = 60 %-80 % remaining power
- 5× = 80 %-100 % remaining power



Please be sure to follow the instructions for use enclosed with the products!

Technical data - FlexLED 230V / 42V

LED	LEDs double-sided (2x180 LEDs/m)
System output	13 W/m / 8W/m
Luminous efficacy	1,500 lm/m / 920lm/m
Light colour	4,000K
Beam angle	240° (120° on each side)
Service life	> 30,000 h
Protection category	IP65
Impact resistance	IK10
Temperature Application range	-20°C to +55°C
Weight	approx. 13.5kg / approx. 6kg / approx. 6kg / approx. 2kg
Dimensions of strip light (WxH)	16x7.5 mm
Length of strip light	
FlexLED 230V 50m / 25m / 10m	(can be extended to max. 100 m)
FlexLED 42V 25m	(not extendable)
Connection cable	
FlexLED 230V 1.5 m (2x1.5 mm² H07 RN-F)	with contour plug)
FlexLED 42V 1.5 m (2x1.5 mm² H07 RN-F)	with CEE plug 2x16A/42V)

Technical data - Emergency battery for FlexLED 230V

Power	50 W
Emergency operation battery	120 min
Battery status	indicated by indicator light
Connected power	max. 1,500 W
Input voltage	100-277 VAC
Output voltage	175 VDC
Battery	22.2 V 6,000 mAh Li-ion battery
Charging time	>8 h
Emergency tripping time	<1 s
Protection category	IP65
Impact resistance	IK08
Temperature operating range	-10°C to +45°C
Connection cable	1.5 m (3x1.5 mm² H07 RN-F with Schuko plug)
Emergency operation Brightness	
10 m	30% 450 lm / m
25 m	20 % 300 lm / m
50 m	10 % 150 lm / m

Item no.	Description
800884	FlexLED strip light 230V on cable reel 50m 'mobile' with trolley and handle, 4,000 K, Wide 240° incl. connection cable
861020	FlexLED strip light 230V on cable reel 25m, 4,000 K, Wide 240° incl. connection cable
800833	FlexLED strip light 230V on reel 10m, 4,000 K, Wide 240° incl. connection cable
335081	FlexLED strip light 42V on cable reel 25m, 4,000 K, Wide 240° incl. connection cable
Accessories	
800834	Emergency power battery 230V 50W for FlexLED strip light, 1.5m connection cable H07 RN-F with Schuko plug
800835	1.5m connection cable H07 RN-F with contour plug for FlexLED strip light 230V
800841	Flicker-free power supply unit with contour plug
800840	Dimmer for FlexLED with contour plug, 1-50% via dimmer, 100% fixed via switch
800885	T-connector for FlexLED light strip 230V
800836	Repair kit for FlexLED continuous-row lighting



Scaffolding lighting, recycling plant



Maintenance lighting, silo



Tunnel illumination, supply tunnel




Maintenance lighting, drying oven



Stationary lighting, maintenance system

WE ARE **EXPERTS** IN YOUR FIELD

Work lights




Construction industry




Public sector



Industrial sector



Safety equipment



Transportation

THE GIFAS WORLD.

All products for your sector at a glance.

More on www.gifas.de/en/gifas-world